

COLLECTION 2020-2024

nelux hong kong international, ltd



**COMMERCIAL & RESIDENTIAL
OUTDOOR LIGHTING**



ARCHITECTURAL LIGHTING

LED SPOTLIGHT

**hotel
shops
home
office
cafe....**

Our spotlights are made from Aluminium Die-casting, electrostatic powder coating.
Reflectors made from Aluminium anodized specular silver and aluminum, also installing lens when required.
Brand of Chip CREE , PHILIPS and other brands like Citizen and Bridgelux available, depending of the product design.
Led Driver Khün, Xz, Osram, Philips.

Input Voltage Multivoltage and 220-240VAC/50-60Hz




SL11060 5W



SL15465 11W



SL11060F 8W



SL15465F 19W



SL7038 5W, 7W



SL8035S 5W, 7W



SL8047 10W



SL9047S 10W



SL9050S 10W



SL8036S 5W, 7W



SL8067 15W



SL9070 15W



SL9070 15W



SL7049 5W, 7W



SL9080 10W



SL9077 10W



SL9097 15W



SL9097S 15W



SL10080 15W, 18W



SL11075 15W, 18W



SL15085 25W, 33W



SL15089 25W, 33W



SL84111TL 10W



SL78111TL 10W



SL84121 10W



SL84111 10W



SL96112 10W



SL96118 15W



SL95112 10W






SL95118 15W



SL11060

Input Voltage AC220-240V, Multivoltage
Light Power 5W
Luminous flux ~480lm
Light Source Philips SMT led
CCT 2700K, 3000K, 4000K
CRI 80 as standard
Beam Angle 15°, 25°, 35°
Driver, Khun, Xz, Philips other options available
Output DC200mA 24V



SL11060F

Input Voltage AC220-240V, Multivoltage
Light Power 8W
Luminous flux ~600lm
Light Source Edison SMT led
CCT 2700K, 3000K, 4000K
CRI 80 as standard
Beam Angle 90°
Driver, Khun, Xz, Philips other options available
Output DC300mA 21V


SL15465

Input Voltage AC220-240V, Multivoltage
Light Power 11W
Luminous flux ~1050lm
Light Source Philips SMT led
CCT 2700K, 3000K, 4000K
CRI 80 as standard
Beam Angle 15°, 25°, 35°
Driver, Khun, Xz, Philips other options available
Output DC200mA 54V



SL15465F

Input Voltage AC220-240V, Multivoltage
Light Power 19W
Luminous flux ~1520lm
Light Source Edison SMT led
CCT 2700K, 3000K, 4000K
CRI 80 as standard
Beam Angle 90°
Driver, Khun, Xz, Philips other options available
Output DC450mA 36V






SL7038

Input Voltage AC220-240V, Multivoltage
Light Power 5W/7W
Luminous flux ~450lm/~630lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 25°, 36°, 45°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option


SL7038



Color palette



SL8035S



Color palette




SL8035S

Input Voltage AC220-240V, Multivoltage
Light Power 5W/7W
Luminous flux ~450lm/~630lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 25°, 36°, 45°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL8047

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~850lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 45°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL8047




Color palette



SL9047S

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~880lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL9047S





Color palette





SL9050S

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~880lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

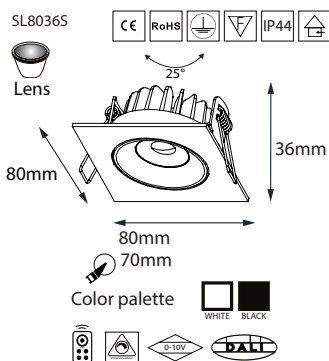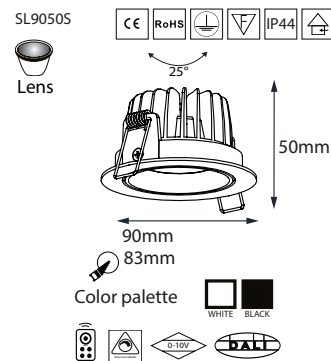


SL8036S

Input Voltage AC220-240V, Multivoltage
Light Power 5W/7W
Luminous flux ~440lm/~610lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 45°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option


SL8067

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1250lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

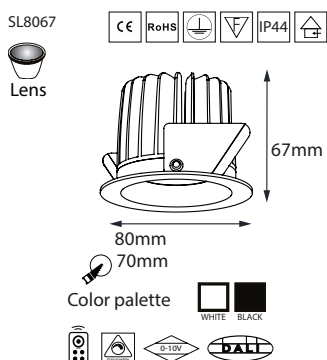

SL9070


Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1250lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

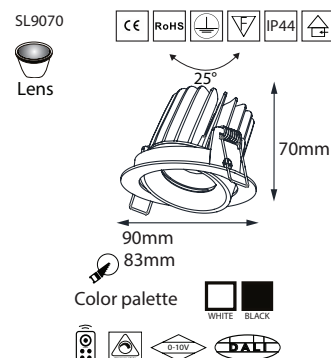




SL9070 25°

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1250lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

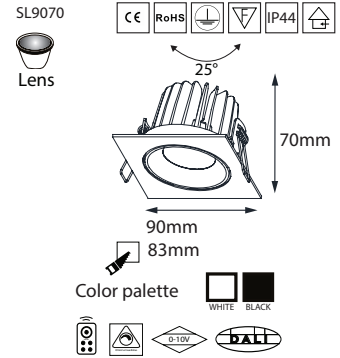

SL7049




SL7049

Input Voltage AC220-240V, Multivoltage
Light Power 5W/7W
Luminous flux ~490lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 45°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL9080 25°


Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~850lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL9080



SL9077 25°

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~850lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

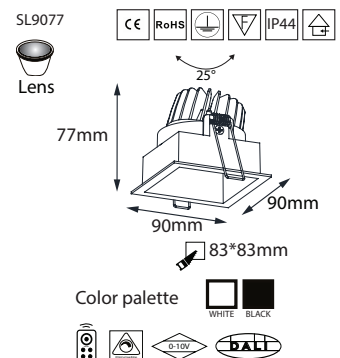


TEGAL SERIES

SL9097

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1280lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 45°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option



SL9097




SL9097

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1290lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Lens 25°, 36°, 60° Reflector 15°, 24°, 38°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL9097



SL10080




SL10080

Input Voltage AC220-240V, Multivoltage
Light Power 15W/18W
Luminous flux ~1320lm/~1580lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Reflector 25°, 40°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL11075

Input Voltage AC220-240V, Multivoltage
Light Power 15W/18W
Luminous flux ~1320lm/~1580lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Reflector 25°, 40°, 60°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL11075







SL15085

Input Voltage AC220-240V, Multivoltage
Light Power 25W/33W
Luminous flux ~2100lm/~2660lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Reflector 15°, 24°, 38°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option


SL15085



SL15089


Input Voltage AC220-240V, Multivoltage
Light Power 25W/33W
Luminous flux ~2100lm/~2660lm
Light Source CREE, other options available Citizen,
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle Reflector 15°, 24°, 38°
Driver, Khun, Xz, Philips other options available
Dimmable 0-10V, Triac, Dali as an option

SL15089




SPOT LIGHT, Tegal series, reference SL15085 25W ,finished in white color

TEGAL SERIES

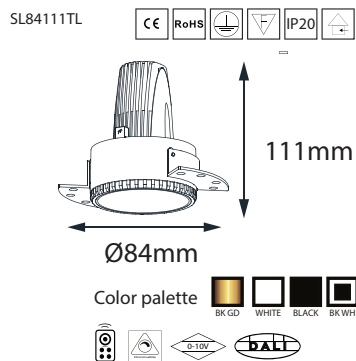

SL84111TL

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~770lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 40°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option

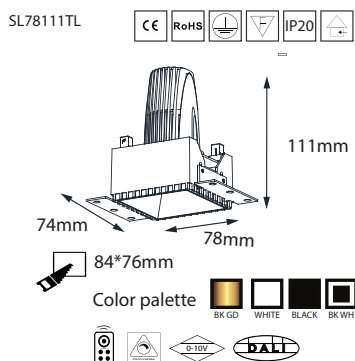



SL78111TL

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~770lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 40°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option




SL84121

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~720lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 36°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option

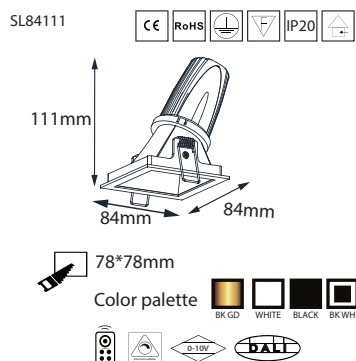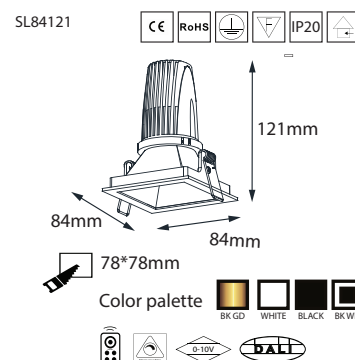


SL84111

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~720lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 36°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option

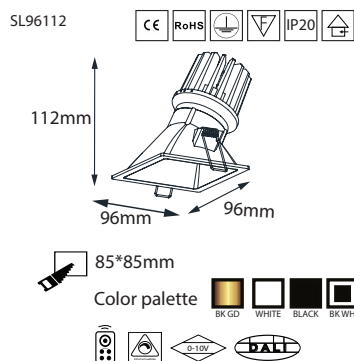

SL96112

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~740lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 40°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option

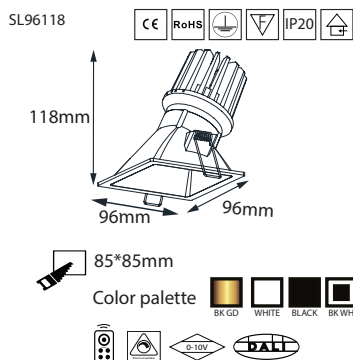


SL96118

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1150lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 40°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option



SL95112

Input Voltage AC220-240V, Multivoltage
Light Power 10W
Luminous flux ~730lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 40°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option

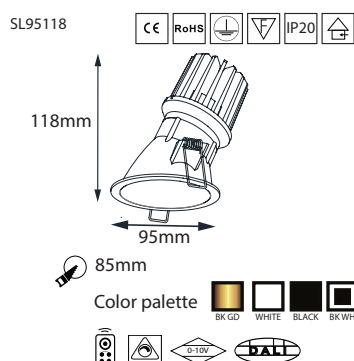

SL95118

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1150lm
Light Source CREE, other options available
CCT 2700K, 3000K, 4000K
CRI 80 as standard, CRI90, 95, 97
Beam Angle 15°, 24°, 40°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option

VOLKI SERIES