

COLLECTION 2018-2020

nelux hong kong international, ltd



DOWNLIGHTS



ARCHITECTURAL LIGHTING

Our DOWNLIGHT are made from Aluminium Die-casting, electrostatic powder coating, and aluminum Reflectors made from Aluminium anodized specular silver.

Brand of Chip CREE and other brands like Citizen, Samsung, Bridgelux available, Led Driver Khün, Xz, Osram, Philips.

Input Voltage Multivoltage and 220-240VAC/50-60Hz



DW9058 7W, 10W



DW12075 15W



DW17085 20W, 25W, 30W



DW230100 35W, 45W



DW195135 43W, 50W



DW140135 18W, 25W



DW160109 25W, 33W, 40W



DW14092 18W, 25W
DW165125 33W
DW195144 45W



DW17588 25W 30W
DW22100 32W 40W



DW124101 25W 35W



DW140111 25W, 30W, 40W



DW150104 25W, 30W, 40W



DW160111 25W, 30W, 40W



DW180122 35W, 40W, 50W



DW200120 35W, 40W, 50W



DW220127 35W, 40W, 50W



DW225129 35W, 40W, 50W



DW260160 50W





DW9058


Input Voltage AC220-240V, Multivoltage
Light Power 7W,10W
Luminous flux ~540lm, 810lm
Light Source everlight SMD
CCT 2700K, 3000K, 4000K
CRI 80
Beam Angle 80°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option
Optional Reflector Silver, Gold, Sandy Silver





DW12075




Color palette



DW9058





Color palette




DW12075

Input Voltage AC220-240V, Multivoltage
Light Power 15W
Luminous flux ~1210lm
Light Source everlight SMD
CCT 2700K, 3000K, 4000K
CRI 80
Beam Angle 90°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option
Optional Reflector Silver, Gold, Sandy Silver

DW17085



Color palette



DW17085

Input Voltage AC220-240V, Multivoltage
Light Power 20W, 25W, 30W
Luminous flux ~1610lm, 2000lm, 2400lm
Light Source everlight SMD
CCT 2700K, 3000K, 4000K
CRI 80
Beam Angle 100°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option
Optional Reflector Silver, Gold, Sandy Silver





DW230100


Input Voltage AC220-240V, Multivoltage
Light Power 35W, 45W
Luminous flux ~2790lm, 3580lm
Light Source everlight SMD
CCT 2700K, 3000K, 4000K
CRI 80
Beam Angle 105°
Driver, Khun, Xz other options available
Dimmable 0-10V, Triac, Dali as an option
Optional Reflector Silver, Gold, Sandy Silver



DW230100

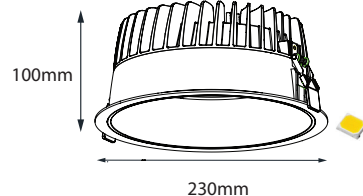


Color palette



DW195135

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 43W, 50W
Luminous flux ~3900lm, ~4500lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 12°, 30°, 45°, 55° & 12°, 20°, 36°, 45°, 60°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option


DW195135     



DW140111


Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 18W, 25W
Luminous flux ~2000lm, ~2400lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 12°, 24°, 45°, 55°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

DW140111     



DW160109



DW160109

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 25W, 33W, 40W
Luminous flux ~2500lm, ~3500lm, ~4100lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 12°, 30°, 45°, 60°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option




DW14092 DW165125 DW195144

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 18W - 25W, 33W - 45W
Luminous flux ~1800lm - ~2500lm, 3300lm - ~4600lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 15°, 30°, 45°, 55° - 12°, 30°, 45°, 60° - & 12°, 20°, 36°, 45°, 60°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option


DW14092




DW165125




DW195144


    



SHOPY SERIES

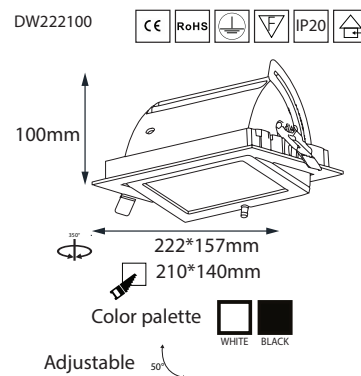

DW17588 DW222100
Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 25W, 29W - 32W, 39W
Luminous flux ~2500lm, ~3100lm - 3600lm, ~3900lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 90°x60° - 90°x70°
& 12°, 20°, 36°, 45°, 60°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

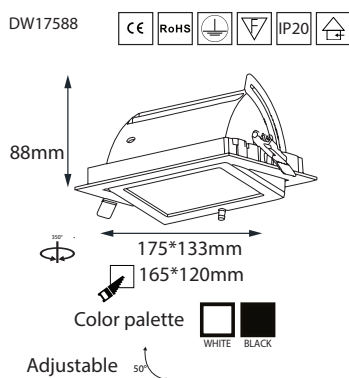


DOWNLIGHT, Shopy series, reference
DW160109 25W finished in white
color



DW124101

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 25W 35W
Luminous flux ~2700lm, ~3500lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 20°, 30°, 50°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option


DW124101     



Color palette  

Adjustable 50°

DW140111     



Color palette  

Adjustable 50°



DW140111


Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 25W, 35W, 40W
Luminous flux ~2600lm, ~3300lm, ~3700lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 45°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option



DW150104

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 25W, 35W, 40W
Luminous flux ~2800lm, ~3500lm, ~3900lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 30°, 50°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option


DW150104     



Color palette  

Adjustable 50°

DW160111     



Color palette  

Adjustable 50°




DW160111

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 25W, 35W, 40W
Luminous flux ~2700lm, ~3400lm, ~3700lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 50°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

DW180122

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 35W, 40W, 50W
Luminous flux ~3300lm, ~3800lm, ~4600lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 45°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

DW180122     



Color palette  

Adjustable 50°




HUGE SERIES




DW200120

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 35W, 40W, 50W
Luminous flux ~3500lm, ~3900lm, ~4900lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 25°, 50°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

DW200120      



DW220127      




Color palette  
Adjustable 50°



DW220127

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 35W, 40W, 50W
Luminous flux ~3500lm, ~3900lm, ~4900lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 50°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

DW225129      




Color palette  
Adjustable 50°



DW225129

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 35W, 40W, 50W
Luminous flux ~3500lm, ~3900lm, ~4900lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 25°, 50°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option

DW260160      



Color palette  
Adjustable 50°



DW260160

Material Aluminum die-casting, electrostatic powder coating
Input Voltage AC220-240V, Multivoltage
Light Power 50W
Luminous flux ~5300lm
Light Source Cree
CCT 2700K, 3000K, 4000K
CRI >80, Optional CRI>90, CRI95, CRI97
Beam Angle 90°
Driver, Khun, Xz, Philips, HEP
Dimmable 0-10V, Triac, Dali as an option