





TS81107

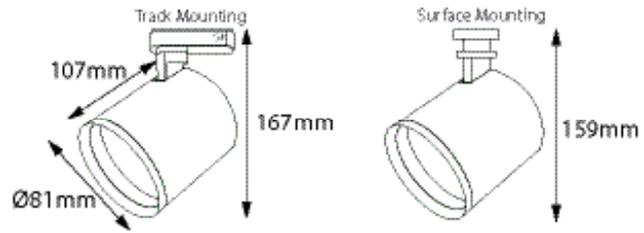

TS81107 Track Spotlight and Surface Mounting



Input Voltage 220-240VAC Multivoltage / 50-60Hz  
 Light Power SMD 9W/15W, COB 20W  
 Luminous flux ~630lm/1050lm, ~1400lm  
 Light Source SMD or COB  
 CCT 3000K, 4000K  
 CRI >80 CRI90, CRI97 as an option  
 Diffuser Lens  
 Beam Angle Reflector Extra wide flood, Oval flood,  
 Rectangle flood, Wall washer flood  
 Driver Built-in  
 Operating Temperature -25°C~+50°



TS98107 Track Spotlight and Surface Mounting

Input Voltage 220-240VAC Multivoltage / 50-60Hz  
 Light Power SMD 18W/30W, COB 30W  
 Luminous flux ~1260lm/2100lm, ~2100lm  
 Light Source SMD or COB  
 CCT 3000K, 4000K  
 CRI >80 CRI90, CRI97 as an option  
 Diffuser Lens  
 Beam Angle Reflector Extra wide flood, Oval flood,  
 Rectangle flood, Wall washer flood  
 Driver Built-in  
 Operating Temperature -25°C~+50°

TS98107

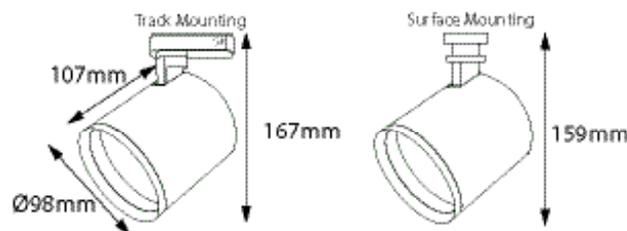

ZOE SERIES