



We suggest you to use a modern, energy-efficient LED lighting technology like Mini Combi and Combi models can be easily integrated into your projects and provide the necessary light therefore creating a pleasant atmosphere. Different frames and different power available in these series.



# MINI COMBI and COMBI light

nelux architectural lighting



MINI COMBI 3W




Light Engine




Application to Hotels

+



Ø45mm



Ø45mm



Ø45mm




Ø45mm



Ø45mm


||



48mm

Ø40mm


Ø41mm



35mm

Ø35mm


Ø37mm



35mm

Ø35mm


Ø37mm



46mm

Ø35mm

Ø37mm





46mm


Ø35mm

Ø37mm

3 Years Warranty



CREE XT-E white



CREE XT-E blue royal



With **MINI COMBI** products architectural features, artwork, textures, foliage, corridors, rooms or other features are subtly highlighted, in a sympathetic and tasteful way bringing key elements to life and add interest and energy to a space.

### Applications

Hotels, apartments, private villa, museums, private residences, restaurants, cafe, ...

MINI COMBI

# MINI COMBI and COMBI light

nelux architectural lighting

MINI COMBI 3W

**Main Features**

Housing made from pure aluminum  
 Input Voltage 220-240VAC, Multi-voltage 110-260VAC 50/60Hz  
 Output Wattage 3W  
 Led Luminous Flux 210lm  
 Led Source CREE XPE led  
 CCT 2700K, 3000K, 5000K  
 Beam Angle 10°, 15°, 25°, 30°, 45°, 60°

**STANDARD**

**LED DRIVER**  
 (1-3)\*1W  
 Input AC100-260V 50/60Hz  
 Output DC3V 700mA+5%


**Optional**

**Dimming Led Driver**


0-10V Driver 10W for 4 Mini Combi 100-265V Output V 10-15V 700mA PF>0.9  
 0-10V Driver 20W for 7 Mini Combi 100-265V Output V 15-25V 700mA PF>0.9

**Trailing edge driver**

Trailing edge 6-12W mini combi 2-4pcs  
 Trailing edge 15-18W mini combi 5-6pcs



CREE XT-E XP-E white




CREE XT-E XP-E blue royal

Clear surface lens 10°

Clear beads lens 10°, 15°, 25°, 30°, 45°, 60°



## MINI COMBI APPLICATION

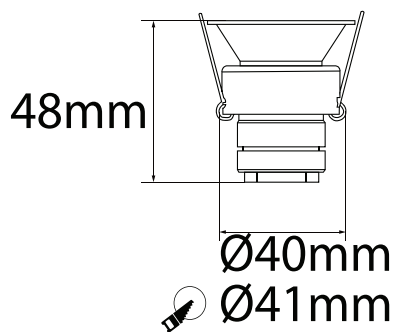

www.nelux.com.hk

lighting product designers and mold management

COMBI 8








Application to Hotels






Light Engine




+



||



3 Years Warranty



With **COMBI 8** products architectural features, artwork, textures, foliage, corridors, rooms or other features are subtly highlighted, in a sympathetic and tasteful way bringing key elements to life and add interest and energy to a space.

Applications

Hotels, apartments, private villa, museums, private residences, restaurants, cafe, ...



# MINI COMBI and COMBI light

nelux architectural lighting

## COMBI 8

### Main Features



Housing made from pure aluminum  
 Input Voltage 220-240VAC, Multi-voltage 110-260VAC 50/60Hz  
 Output Wattage ~7W  
 Led Luminous Flux 560lm  
 Led Source CREE led  
 CCT 2700K, 3000K, 5000K  
 Beam Angle 30°, 45°, 60°

### STANDARD

LED DRIVER  
 1\*8W  
 Input AC100-260V 50/60Hz  
 Output DC36V 200mA+5%

### Optional



Dimming Led Driver  
 Trailing edge driver



## COMBI APPLICATION

Clear surface lens 30°, 45°, 60°

Clear beads lens 30°, 45°, 60°

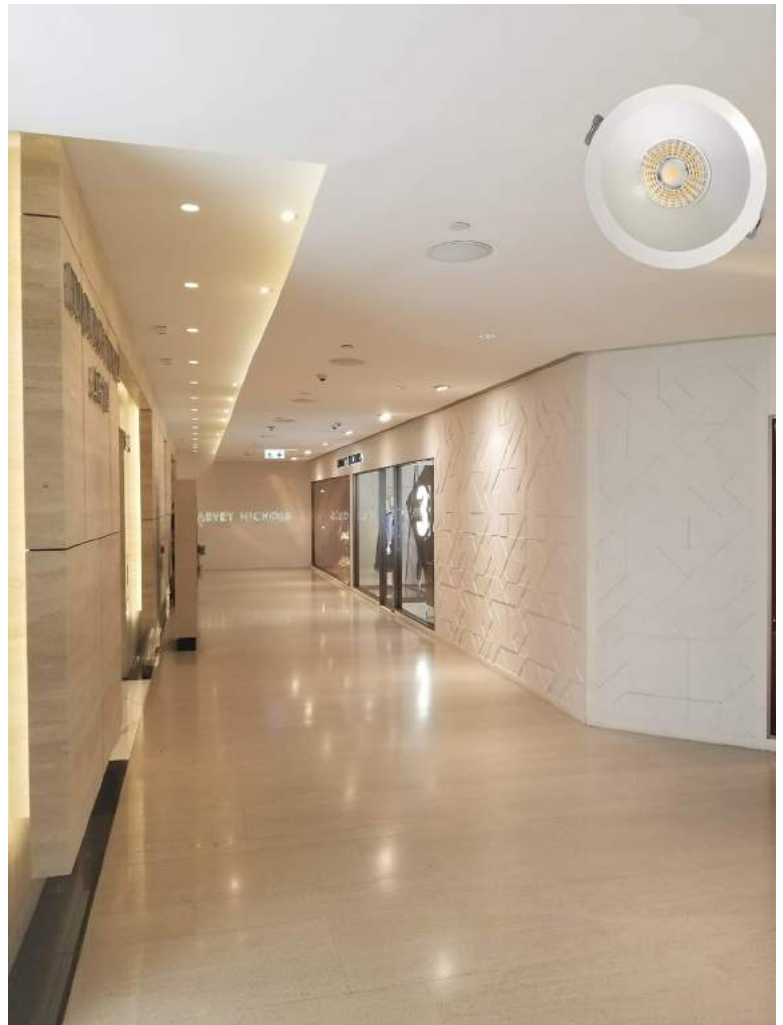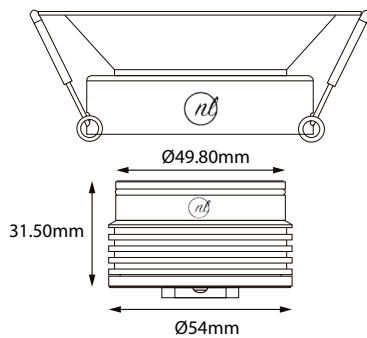

COMBI 8

www.nelux.com.hk



lighting product designers and mold management